

# Multifunctional Direct Roving

## ECT 4301H-1200

### Identification

**Example :** ECT 4301H-1200

**Glass type :** ECT

**Sizing code :** 4301H

**Roving density(tex) :** 1200



### Product Description

Direct roving for PA, excellent mechanical properties, white color of the compounds, suit for LFT. NPE free.

### Product Benefits

- Surface treated by special sizing
- Stable roving density
- Good use of technology
- Excellent mechanical properties
- Excellent glycol resistance
- White color

### Technical Characteristics

Sizing type	Filament Diameter (μm)	Tensile strength (N/Tex)	LOI (%)	Roving Density tex(g/km)
--	ISO1888	ISO3341	ISO1887	ISO1889
Silane	±1	≥0.3N/Tex	0.5±0.1	±5%


Product code	Glass Type	Filament diameter[μm]	Roving Density tex(g/km)
ECT4301H	ECT	14	1200

Note : Please contact us if you have special requirements.

## Packing

Rovings Weight(kg)	Rovings size(mm)			Pallet Dimensions L x W x H (mm)	Net Weight approx. (Kg)	Rovings per Pallet
	External Dia.	Inter Dia.	Height			
15-18				1140*1140*940	48	720-864
	280	152/162	260	1140*1140*1200	64	960-1152

## Pallets illustration

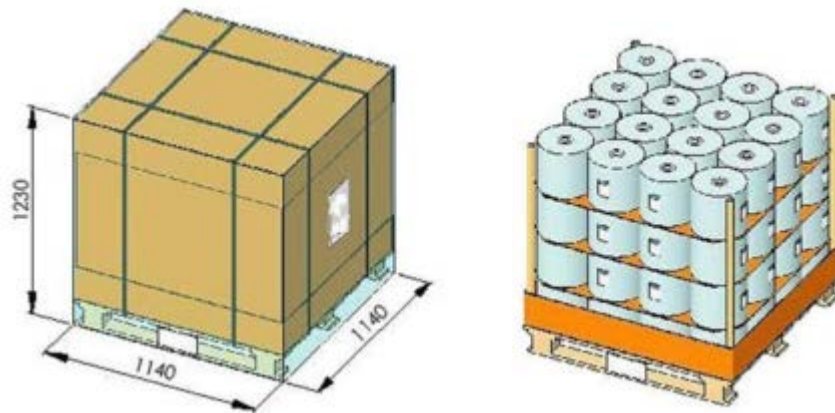

Note: Products can be packed according to the customer's request.

## Storage

If there is no special requirements, goods should be stored in dry and cool place. Do not open the package before using in order to prevent absorbing moisture.



FIBERGLASS